

Bellows suction cup (round)

## FG 9 NBR-CO-55 N016




Art.-Nr.: 10.01.06.03259



### Technical data

Suction cup material	Nitrile rubber NBR-conductive
Material hardness [Shore A]	55.0 Shore A
Size	9.00
Number of folds	2.5

FG 9 NBR-CO-55 N016

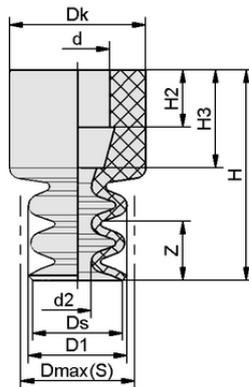

### Design data

Height H2	3.80 mm
Height H	15.00 mm
Outside diameter D1	8.9 mm
Head diameter Dk	9.0 mm
d2	4.1 mm
Internal diameter d	4.50 mm
Spring stroke Z	3.0 mm
Diameter Ds	9.0 mm
Height H3	8.20 mm
Diameter Dmax(S)	9.5 mm

Note: Acceptable dimensional tolerances for elastomer parts concerning to DIN ISO 3302-1 M3

Design data FG 9 NBR-CO-55 N016



[WWW.SCHMALZ.COM/10.01.06.03259](http://WWW.SCHMALZ.COM/10.01.06.03259)

1

Art.-Nr.: 10.01.06.03259

**Technical data**

Nipple family	N 016
Suction cup material	Nitrile rubber NBR-conductive
Material hardness [Shore A]	55.0 Shore A
Workpiece radius min. (convex)	10.0 mm
Pull-off force	2.30 N
Suction force (-600mbar)	0.79 N
Weight	0.60 g
Volume	0.297 cm <sup>3</sup>
Size	9.00
Number of folds	2.5
Product family	FG

Note: Suction force: The suction force values are theoretical values at -0.6 bar vacuum and a dry, smooth and even workpiece surface – they are specified without safety factors. Hose inner diameter: The recommended hose diameter refers to a hose length of approx. 2 m

